


## TURBO BALANCING MACHINES

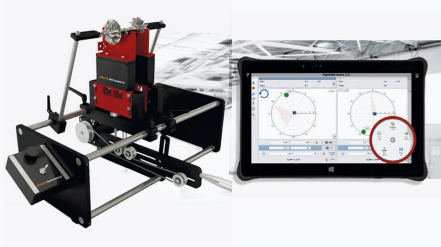

### FEATURES

- Balance Assemblies without trial masses.
- Adjustable RPM with speed driver.
- Easy to use and easy to adjust.
- Adjustable pulleys.
- Manual adjustment of the transmission belt.
- Bearing supports to minimize mechanical losses.
- Bearings and nylon supports. Laser RPM sensor.
- Vibration sensors isolated to prevent corrosion.

### EI 30 DYNAMIC BALANCING MACHINE

- Minimum mass: 50 grams
- Maximum mass: 30 kg
- Residual Unbalance: 2 mg
- Speed: 800 – 15,000 RPM
- Type: Soft Bearing



### EI 300 DYNAMIC BALANCING MACHINE

- Minimum mass: 1 kg
- Maximum mass: 300 kg
- Residual imbalance: 2 mg
- Speed: 450 – 5,000 RPM
- Type: Soft Bearing



### EI 1000 DYNAMIC BALANCING MACHINE

- Minimum mass: 3 kg
- Maximum mass: 1000 kg
- Residual imbalance: 5 mg
- Speed: 450 – 5,000 RPM
- Type: Soft Bearing




### EI 2000 BALANCING MACHINE

- Minimum mass: 7 kg
- Maximum mass: 2000 kg
- Residual imbalance: 10 mg
- Speed: 450 – 3,000 RPM
- Type: Soft Bearing



### EI 10T BALANCING MACHINE

- Minimum mass: 200 kg
- Maximum mass: 10,000 kg
- Residual imbalance: 10 mg
- Speed: 350 – 2,500 RPM
- Type: Soft Bearing



Printed in Jan 2019



**PT LUWES SOLUSI SPASIAL**  
Ruko Griya Depok Asri No 36  
Depok 16411, West Java  
Indonesia

Phone : +6221-77828320  
SMS / WA : +628111077372  
marketing@luwessolusispasial.com  
www.luwessolusispasial.com